

## MP-... 3\_100


Insulating mat Class 3 - 1 x 1 m

### Application :

- Insulating mat for live and dead work. Maximum operating voltage: 26 500 V AC - 39 750 V DC.
- Used to cover the floor for the electrical protection of operators in electrical installations.
- Protect the workers from the ground potential.
- Must be adapted to the nominal voltage of the network supplying the installation on which it is used.

### Features :

- In accordance with IEC 61111:2009 standard and to specific properties of the "C" Category (extremely low temperature folding test at - 40 °C).
- RoHS2 compliant. REACH compliant (SVHC free).
- Material: elastomere without halogen.
- Unit test in production.
- D bar code (Datamatrix) on marking with direct link to user guide and technical sheet.
- Storage temperature: +10°C to +21°C.
- Operating temperature: -40°C to +55°C.

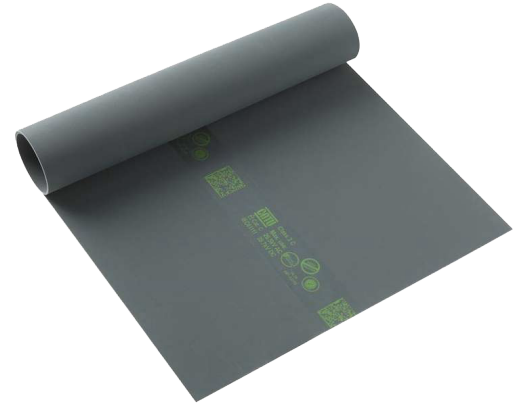

Reference	Dimensions		Protection	Voltage		Thickness (mm)	Weight (kg)
	Length (mm)	Width (mm)	Class	Operating Voltage AC	Operating Voltage DC		
MP-42/11	1 000	1 000	3	26 500 V	39 750 V	3,2	4,5